

REALWOOD

REALWOOD COLLECTION

PARÉ



PA

PARE Innovations is a premier industry player in the interior design space. As the name suggests, we primarily deal into innovative surfaces for interior as well as exterior surfaces. **PARE** Soffit systems are one of our latest Innovations.

A photograph of a forest floor covered in vibrant green moss. On the left, a portion of a tree trunk with rough, textured bark is visible. In the background, a bright light source, possibly sunlight filtering through the trees, creates a hazy, golden glow. The overall scene is lush and natural.

RE



“Inspired by

the meticulous, captivating and exquisite

aspects of nature”

REALWOOD




COLLECTION

A close-up photograph of tree bark, showing a rough, textured surface with vertical ridges and grooves. Patches of bright green moss are growing on the bark, particularly on the right side. The lighting is natural, highlighting the intricate details of the wood's texture.


REAL

THE STUNNING
BEAUTY OF
REAL WOOD
IN YOUR SPACE

WOOD

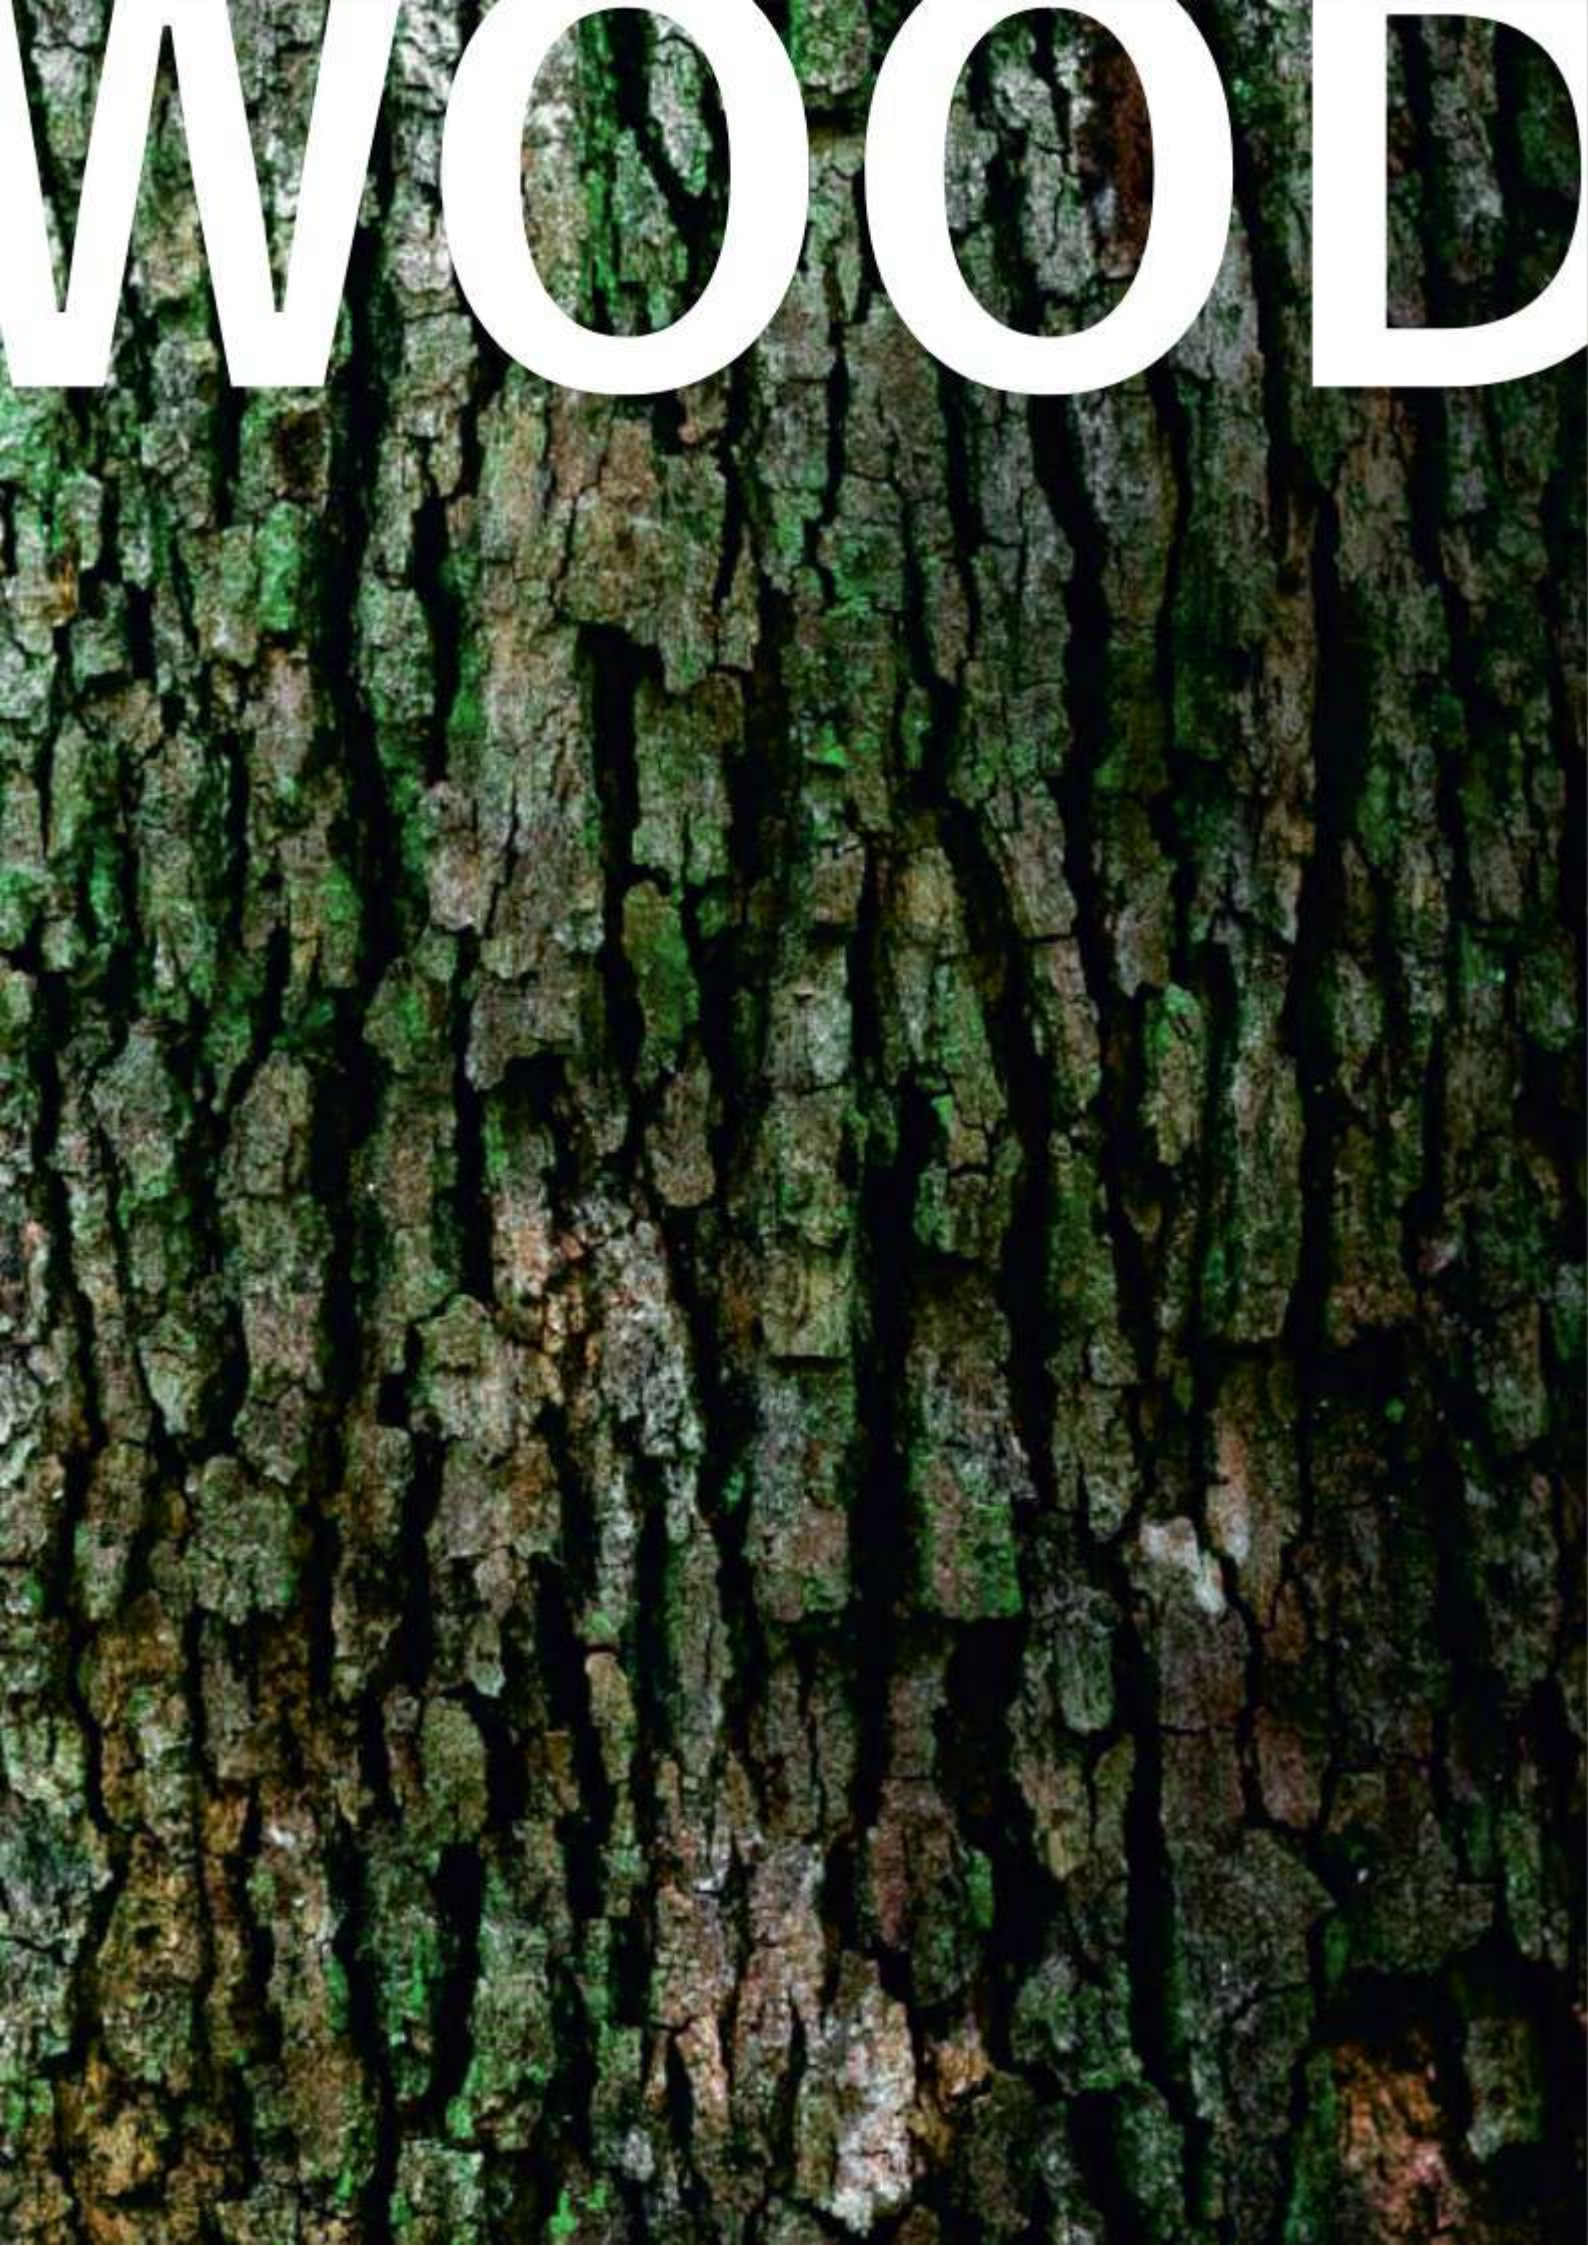



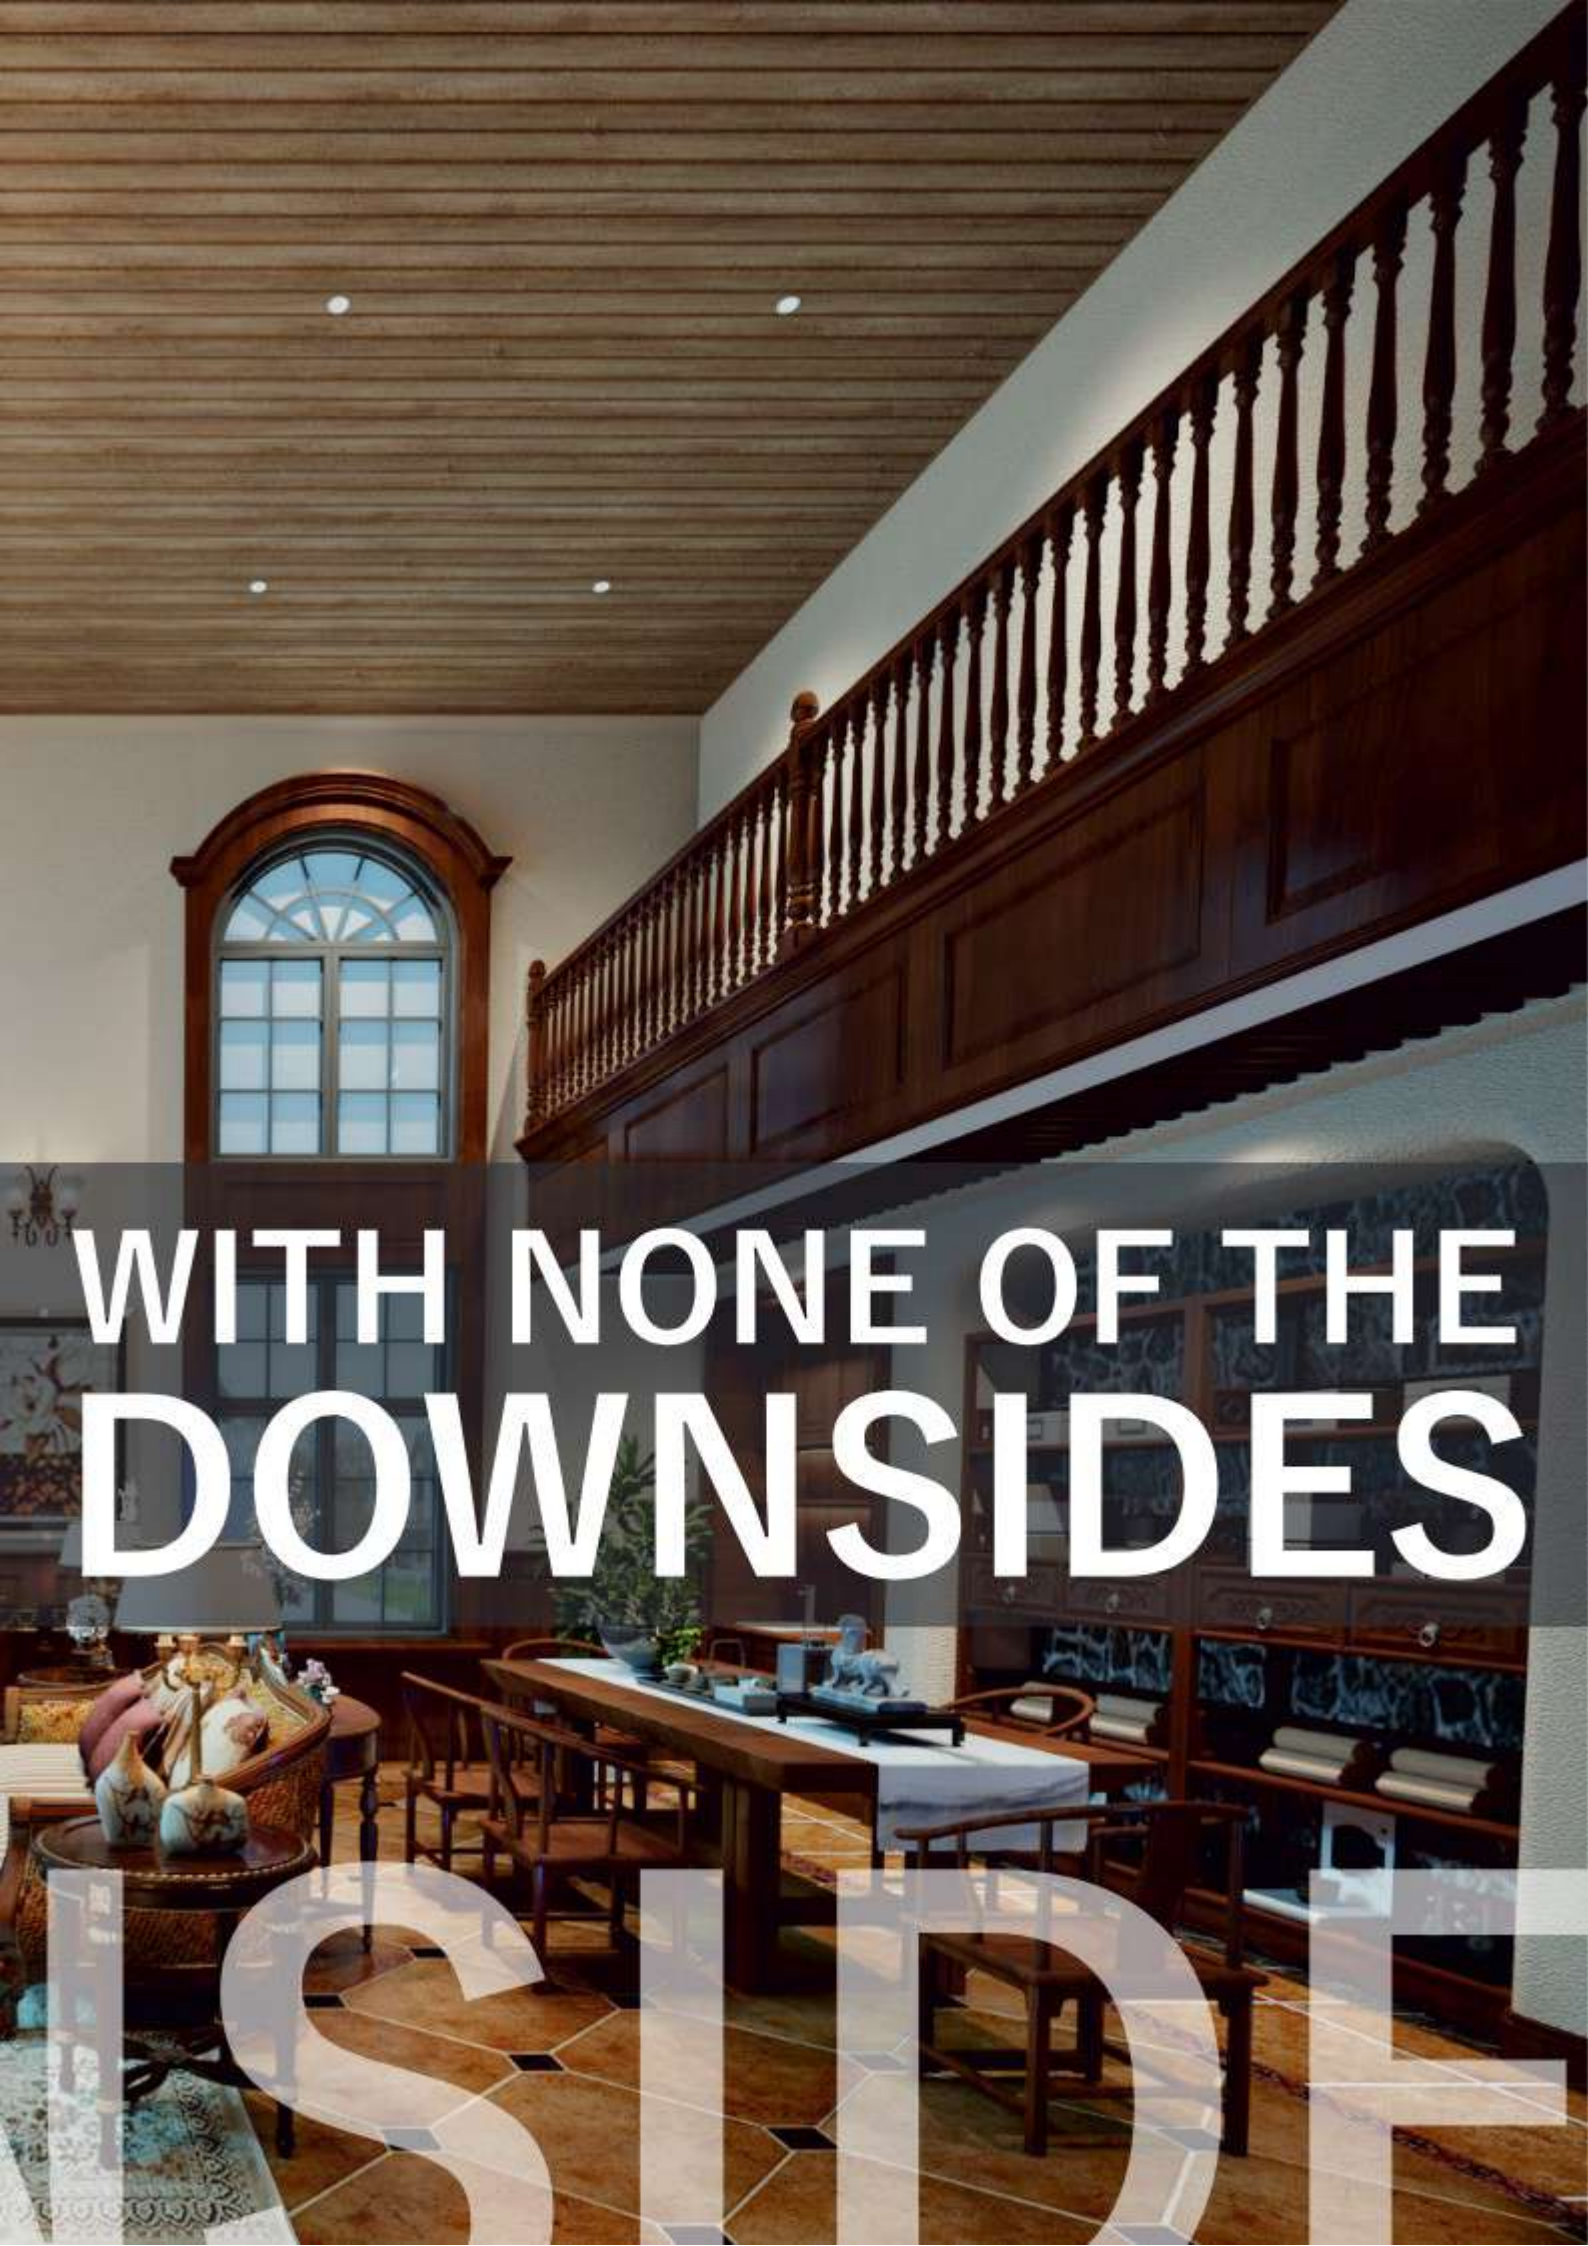

WITH NONE OF THE
DOWNSIDES

IS IT

REALWOOD

ARTISAN
OAK

INTRODUCING

PARÉ
SOFFIT

REALWOOD COLLECTION



IMPERIAL
NUT

REAL WOOD

Collection



Artisan Oak




Imperial Nut



MADE IN
INDIA

Features

PARÉ presents a fusion of Real wood look & modern technology with Soffit Systems.

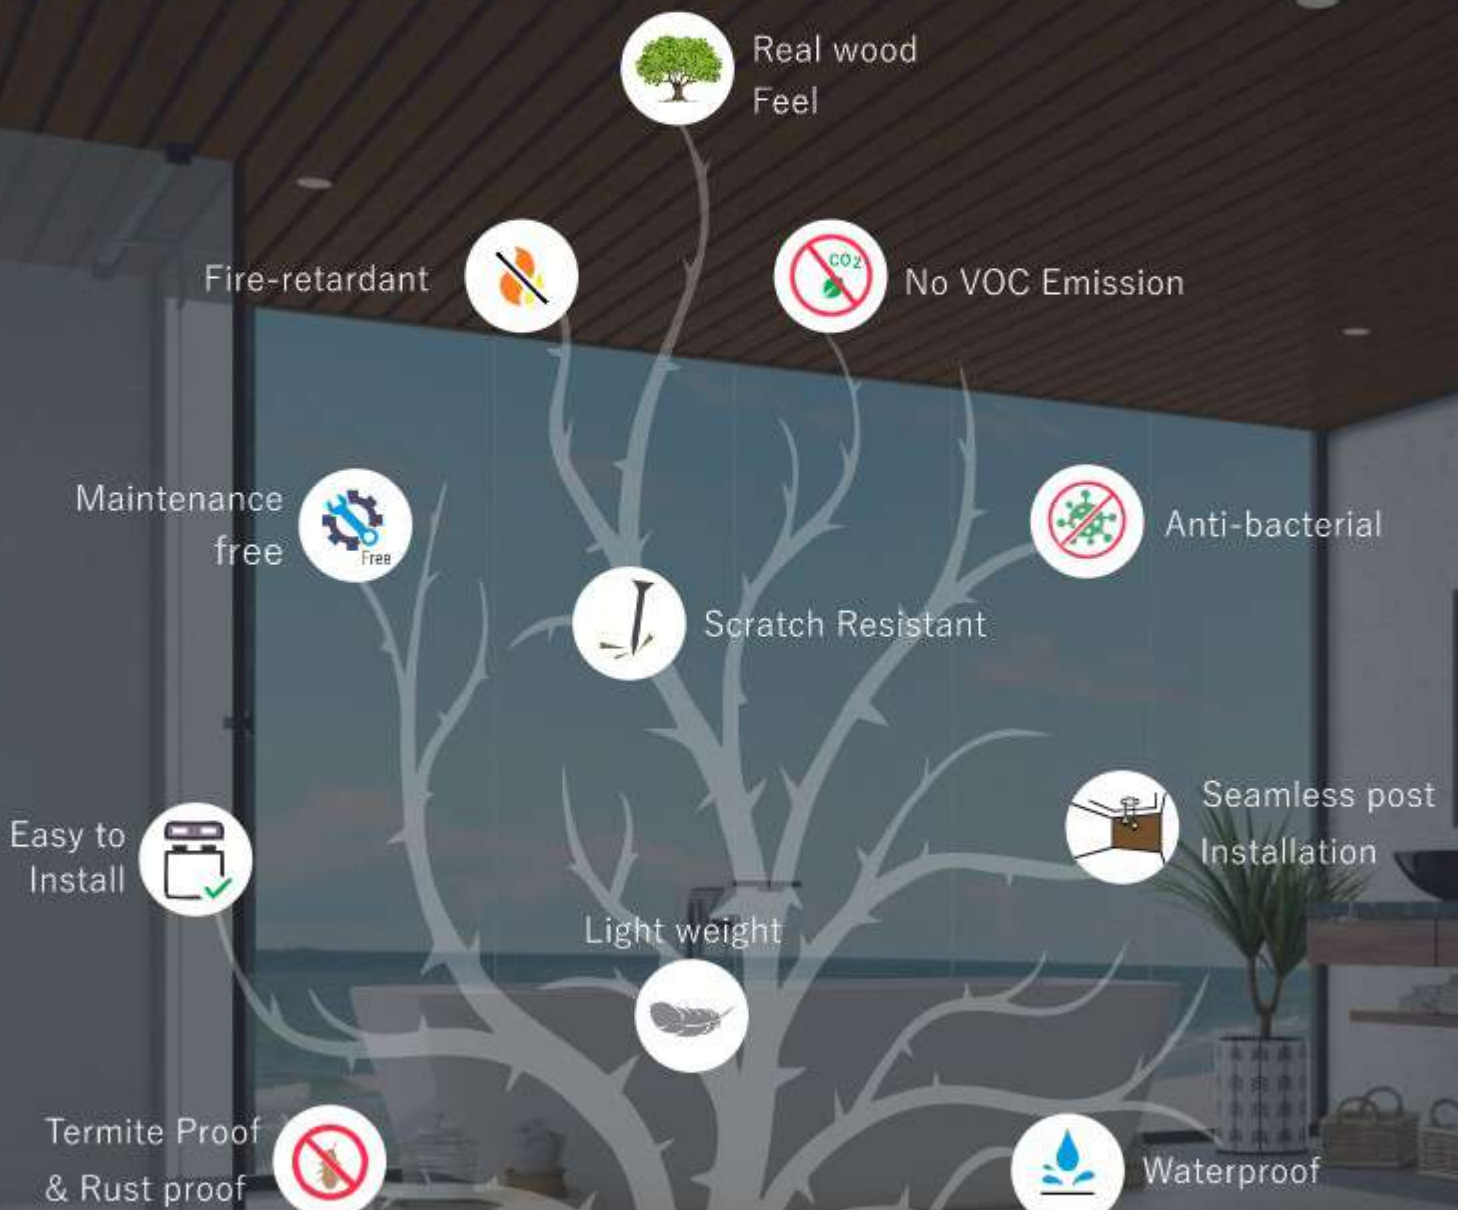

FEATURES

Product Sizing

Soffit Panels



J-Trim

Perimeter profile

3060/4000



T-Trim

Connector Profile

3060/4000



Inside Corner Profile

3060



Outside Corner Profile

3060



**Sizing in mm



INVEST IN

FU



THE TURE.

TECHNICAL D

TECHNICAL DECLARATION

Fire retardant:

PARE Soffit and its accessories comply with Ball-pressure, Needle flame and Glow-wire test. Along with that, it also complies with UL94 V0 test acquiring a class 1 flammability rating when tested in accordance to IS 10151.

Cold resistance:


PARE Soffit and its accessories comply with cold duration test (-20 degrees) in accordance with IS 10151.

Anti-Bacterial:

PARE Soffit and its accessories were tested with 1000 cfu/ml of various different fungi and bacteria; within 30 seconds, the value is reduced to 0 cfu/ml thus making it a truly anti-bacterial product.

Product Specifications:

Meets or exceeds the standard specification of (ASTM D-4477) and its referenced documents. Where not defined in ASTM D-4477, our products also meet the stringent quality control parameters of **PARE**.

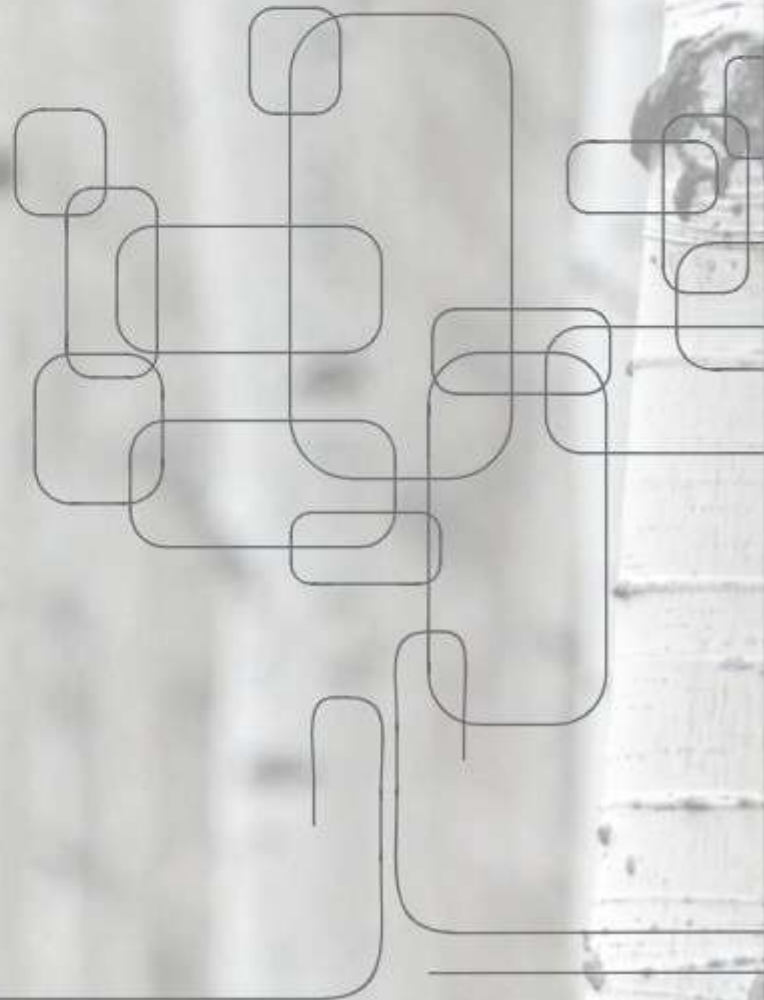

DECLARATION

Relevant Codes and Regulations Compliance:

Conforms to ASTM Specifications D-4477

Colour: Uniformity is spectrophotometrically controlled.

Lock: Optically measured and controlled.

Product Test Data:

| TESTS | RESULTS |
|------------------------|--|
| Impact resistance: | No deformation observed. (Tested at 50 LBS) |
| Tensile strength, MPa: | >37.0 |
| Tensile modulus, MPa: | >2000 |
| Surface distortion: | None at 120F |
| Length: | Within ¼" of specification |
| Lock control: | Complies |
| Color Change: | <2 grayscales (16 hrs under 1200W/m2 UV radiation at 50 degrees) |
| Squareness | <1/8" of square |

Declared Performance:

| Essential Characteristic | Performance | Harmonised Technical Specification |
|--------------------------------|-------------|------------------------------------|
| Reaction to fire EN 13501-1 | D-s3;d0 | EN 13245-2:2009/AC:2010 |
| Release of Dangerous substance | NPD | |
| Durability | A.4.65 | |